

SKIPPER ETN200S

200 kHz Echo Sounder Transducer



Transducer 200kHz Without adaptors.
for Sea valve ETNSLJB and tank with Ice protection
ETN0200FS 25m cable, ETN200FSX 40m cable



Transducer 200kHz
with adaptor for Sea valve SB/DB-100
ETN0200SG 25 m cable. ETN200SXG 40m



Transducer 200kHz
ETN200STA 25m cable. ETN200SXTA 40m
with adaptor for Aluminium tank ETNALC



Transducer 200kHz
ETN200ST 25m cable, ETN200SXT 40m
with adaptor for Steel tank ETNST/ ETNSTC

The ETN200S is a 200 kHz transducer with 25 or 40 m cable. It comes with different adaptors in order to fit to different bottom mountings.

Features:

200 kHz

The beam angle is 11°


Mounting options

- Steel tank, Aluminium tank, Sea valve for single or double bottom hull designs.


SKIPPER ETN200S

200 kHz Echo Sounder Transducer

Transducer	ETN200ST	ETN200SXT	ETN200SG	ETN200SXG	ETN200FS	ETN200FSX	ETN200STA	ETN200SXTA
Resonance Frequency	200kHz +/-5kHz	200kHz +/-5kHz	200kHz +/-5kHz	200kHz +/-5kHz	200kHz +/-5kHz	200kHz +/-5kHz	200kHz +/-5kHz	200kHz +/-5kHz
Beam angle	11°	11°	11°	11°	11°	11°	11°	11°
Cable length	25 m	40 m	25 m	40 m	25 m	40 m	25 m	40 m
Installation	Steel tank ETNST and ETNSTC	Steel tank ETNST and ETNSTC	Sea valve 100mm single bottom SB-100-xx and double bottom DB-100-xx	Sea valve 100mm single bottom SB-100-xx and double bottom DB-100-xx	Sea valve ETNSLJB and Steel tank with Ice protection ETNSTCI	Sea valve ETNSLJB and Steel tank with Ice protection ETNSTCI	Aluminium tank ETNALC	Aluminium tank ETNALC
Delivery includes	Junction box	Junction box	Junction box	Junction box	-	-	Junction box	Junction box
Weight	11.5 kg	13.5 kg	9.5 kg	11.3 kg	6,5 kg	9.5 kg	9 kg	11 kg
Shipping dimensions	41x30x16cm	36x29x22cm	41x30x16cm	36x29x22cm	41x30x16cm	36x29x22cm	41x30x16cm	36x29x22cm
Type	TGM-50-200-25L	TGM-50-200-40L	TGM-50-200-25L	TGM-50-200-40L	TGM-50-200-25L	TGM-50-200-40L	TGM-50-200-25L	TGM-50-200-40L
Impedance (Ω) at resonance	200-400	200-400	200-400	200-400	200-400	200-400	200-400	200-400
Static Capacitance (pF)	2500 ±20%	2500 ±20%	2500 ±20%	2500 ±20%	2500 ±20%	2500 ±20%	2500 ±20%	2500 ±20%
Insulation Resistance (MΩ)	500 and over	500 and over	500 and over	500 and over	500 and over	500 and over	500 and over	500 and over

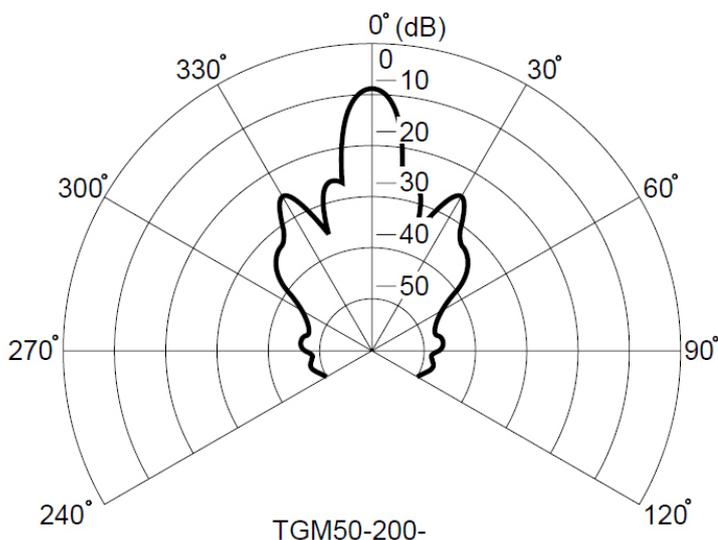


Dimensions of transducer without adaptor

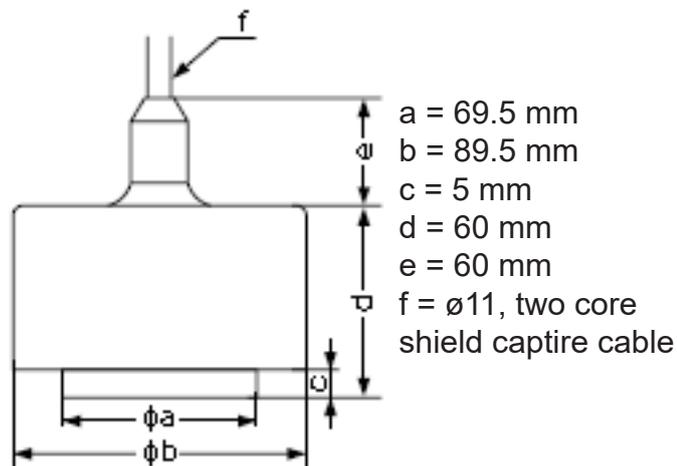

ZZL-01019 Junction box 1151/ZWR for Echo Sounder Transducers included with most ETN050



SKIPPER



SKIPPER Electronics AS
 Enebakkveien 150
 P.O.Box 151, Manglerud
 0612 Oslo, Norway
www.skipper.no

Date: March 2021
 Version: 2021.03.19