



SKIPPER

CD402CU-SC. DL1 Multi Control Unit

Specifications


Power supply	DC: 24 V DC (18-32)
Power consumption	Max 3 W at 24 V typ. 2W
Display	Up to 4 lines with LED
Display outputs	Speed – through water longitudinal Distance – total/trip water distance Temperature – water
Mounting dimensions	124 x 124 mm. Bracket or panel mounting
Front plate	144 x 144 mm to DIN standard
Depth.	59 mm
Weight cabinet	1 kg
Protection	IP 22
Outputs	<ul style="list-style-type: none"> 1 x NMEA 0183 (IEC61162-1/2) 1 x LAN for internal communication
Inputs	<ul style="list-style-type: none"> 2 x NMEA 0183 protocols 1 x LAN for internal communication Remote dimmer via DIM input or NMEA input
Operating temperature	-15 to 55°C
Storage temperature	-20 to 70°C
IP rating	IP22
Classification	Made acc. to IMO performance standard
Manufacturer	SKIPPER Electronics AS, Norway

Overview

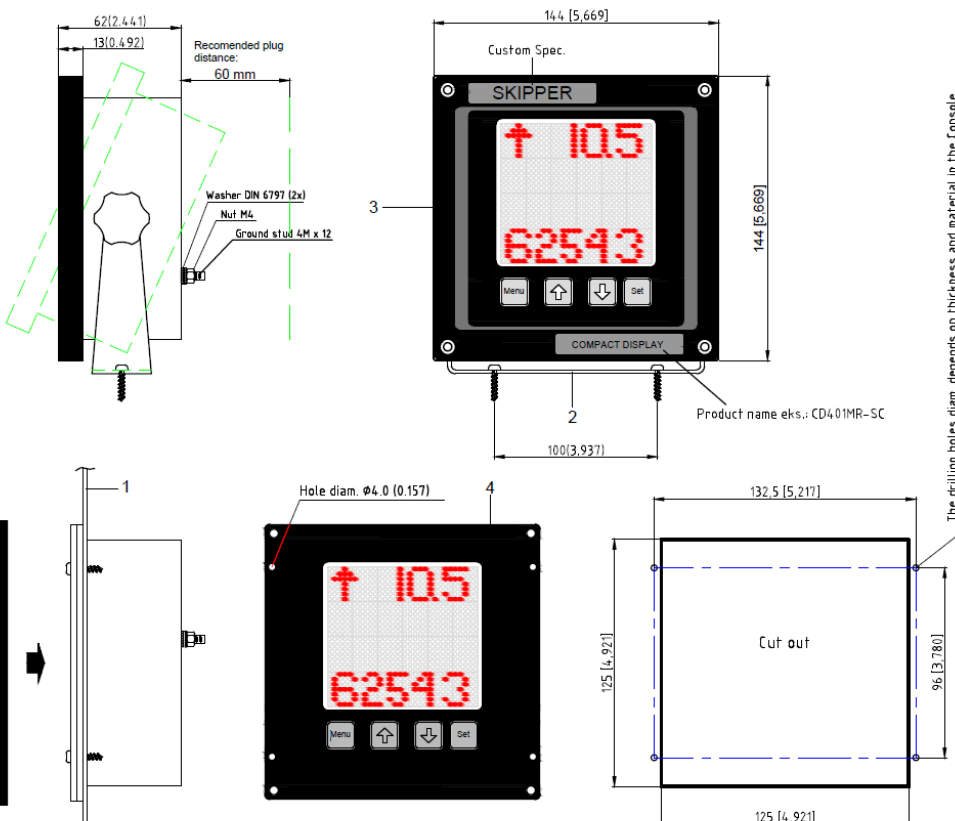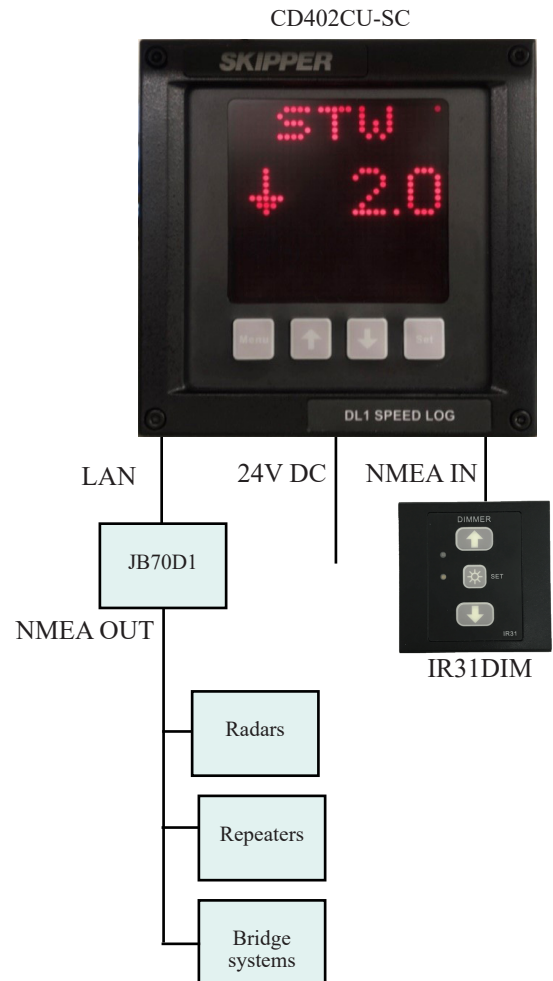

Dimensions in mm

SKIPPER Electronics AS
 Enebakkeveien 150
 P.O.Box 151, Manglerud
 0612 Oslo, Norway



www.skipper.no

Date: 19th. November 2019