

SKIPPER

SUZUKI

For more than 50 years, SUZUKI has developed electronics that fishermen trust.

ES-2035

10.4 inch COLOR LCD ECHO SOUNDER

SINGLE FREQUENCY UNIT



DUAL FREQUENCY UNIT



SUZUKI FISH FINDER CO., LTD. is one of the leading echo sounder providers focused on customer needs and targets the commercial fishing market by providing value-added, customized sounders.

FEATURES

The ES-2035's advanced features make it suitable for a variety of fishing. Since introducing the ES-1025/2025, SUZUKI has made continual strides to improve its features.

The following shows the upgraded Echo Sounder ES-2035.

CLEAR COLOR SCREEN

10.4 inch, bright, high resolution, sunlight readable, full-color advanced TFT screen

EASY OPERATION

Simple key operation and setting menu

VARSATILE FUNCTIONS

Dynamic range, ST-small target mode, Color palette function, A-scope, White Line feature, Depth and Fish Alarms

LIGHT & COMPACT LCD monitor

An ideal unit to install where space is limited.


SPECIFICATIONS

■ RANGE	0~5 · 10 · 15 · 20 · 30 · 40 · 50 · 60 · 80 · 100 · 150 · 200 · 300 · 500 · 1000 · 1500 · 2000 m fm or br 0~15 · 20 · 30 · 40 · 50 · 60 · 80 · 100 · 150 · 200 · 300 · 500 · 1000 · 1500 · 2000 · 3000 · 5000 ft
■ PHASED RANGE	The upper range limit may be set per 2/5 of the range between 0~999
■ PARTIAL EXPANSION	Available as a combination of the range and the phased range.
■ BOTTOM EXPANSION	0~1 · 2.5 · 5 · 10 · 20 · 50 · 100 · 250 m fm or br 0~5 · 10 · 20 · 50 · 100 · 250 · 500 · 1000 feet
■ FREQUENCY & OUTPUT POWER	Single frequency: either 50kHz(600w or 1kw) or 200kHz(600w) Dual frequency: 50kHz(600w or 1kw) & 200kHz(600w)
■ DISPLAY MODES	Single frequency: NORMAL · BOTTOM EXPANSION · A-SCOPE · NAVIGATION Dual frequency: 50kHz NORMAL · 200kHz NORMAL · 50/200kHz DUAL FREQUENCY · SMALL TARGET NORMAL · BOTTOM EXPANSION · A-SCOPE · NAVIGATION
■ DISPLAY DATA	Depth Scale · Depth(3 steps) · Water Temp.(3 steps) (OP)* · Temp. Scale (OP)* · VRMs · Lat/Lon (OP)* Speed (OP)* · Course (OP)*
■ FUNCTION DISPLAY	Alarm · Interference reduction · Picture speed · Auto range · Auto shift · Frequency(Dual frequency unit)
■ OTHER DISPLAY	Time marker (30 seconds elapsed time) · Color scale · Temp. graph (OP)* · Alarm set maker Expansion range line · TX power
■ OTHER FUNCTIONS	STC · Threshold · White line · Interference reduction · Noise reduction · Auto range · Auto shift Scale position change (2 positions) Depth display position (2 positions) · Alarms(shallow, deep, fish) Temp. display position change (2 positions) · Color tone selection (6 selections) · Output power reduction Expansion mode change(4 types) · Picture speed (stop & 4 changes) · User settings · Key function Backup
OTHERS	
■ DISPLAY	10.4 inch TFT color LCD monitor (H480×V640 pixels)
■ POWER SUPPLY	10.5~40VDC 25W Max.
■ INPUT DATA	Water temp. sensor (OP)* : OP-102 or OP-41 Temp. data (OP)* : NMEA-0183 (MTW) Positional data (OP)* : NMEA-0813 (VTG · GGA · GLL · RMC)
■ OUTPUT DATA	Data:NMEA-0183 (MTW · DBT) NOTE - (OP)* indicates that optional equipment is required.

* Specifications are subject to change without notice.



For safe using, be sure to read the "Operation Manual" before using this model.

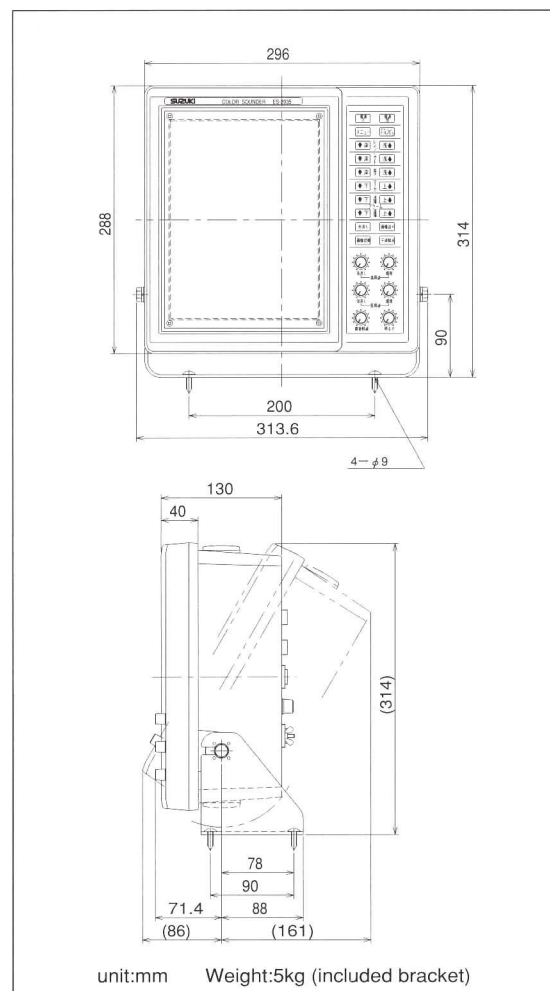

Skipper Electronics A/S
Ryensvingen 5
P.O.Box 151, Manglerud
0612 Oslo, Norway
www.skipper.no

Telephone +47 23 30 22 70
Telefax +47 23 30 22 71
E-mail: skipper@skipper.no
Co.reg.no: NO-965378847 -MVA

SKIPPER